

**These internal buses and jumpers allow +15volts, -15volts and shield to be connected from the two studioHub+ RJ45(s) and the terminal block.**

A circuit path requires at least two jumpers.

**JU1** install to tie terminal block shield to internal shield bus.

**JU2** install to tie terminal block -15volts to internal -15volt bus.

**JU3** install to tie terminal block +15volts to internal +15volt bus.

**JU4** install to tie StudioHub+ RJ45 J2 +15volts to internal +15volt bus.


**JU5** install to tie StudioHub+ RJ45 J2 -15volts to internal -15volt bus.

**JU6** install to tie StudioHub+ RJ45 J3 +15volts to internal +15volt bus.

**JU7** install to tie StudioHub+ RJ45 J3 -15volts to internal -15volt bus.

**JU8** install to tie StudioHub+ RJ45 J2 shield to internal shield bus.

**JU9** install to tie StudioHub+ RJ45 J3 shield to internal shield bus.

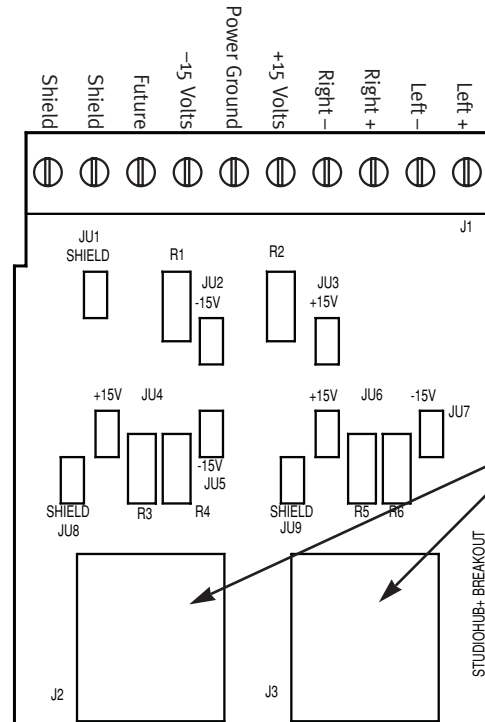

2 StudioHub+ RJ45 with pins below in parallel

1. Left + or AES/EBU+
2. Left - or AES/EBU-
3. Right +
4. Power Ground
5. Future