

1 2 3 4 5 6




**SPECIFICATIONS:**

ENCLOSURE: DIECAST ALUMINUM  
 COLOUR: BEIGE (POWDER COATED)  
 WEIGHT: <1.36kg (3.0 lbs)  
 TEMPERATURE STORAGE: -55° C TO +85° C  
 TEMPERATURE OPERATING: -40° C TO +70° C  
 RELATIVE HUMIDITY: 0-100% CONDENSING  
 ALTITUDE: 6,096m (20,000 ft)  
 FREQUENCY: 800MHz TO 1800MHz  
 TERMINATION: 50Ω

INPUTS:  
 TNC GPS FROM ANTENNA - DESIGNED FOR  
 FOR ANTENNA GAIN OF 3+dB +6/-3 dB.

OUTPUTS:  
 2 PIN 12-24V AC OR DC  
 ST TYPE FIBER OPTIC CONNECTOR FOR SIMPLEX MULTIMODE  
 50/125 MICRON CABLE

TO BE USED IN RVL KIT 516061 (INCLUDES POWER CABLE).  
 NOTES: SYSTEM ALLOWS FIBER RUNS OF UP TO 1524 METERS  
 (5000 FEET) OF 50/125 FIBER OPTIC CABLE.

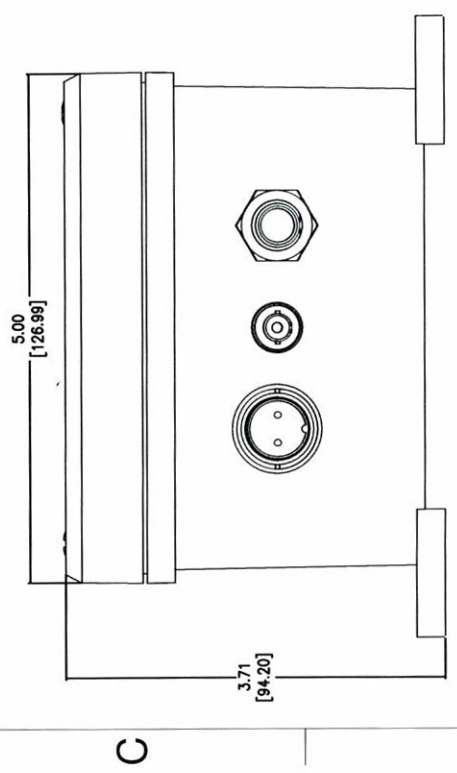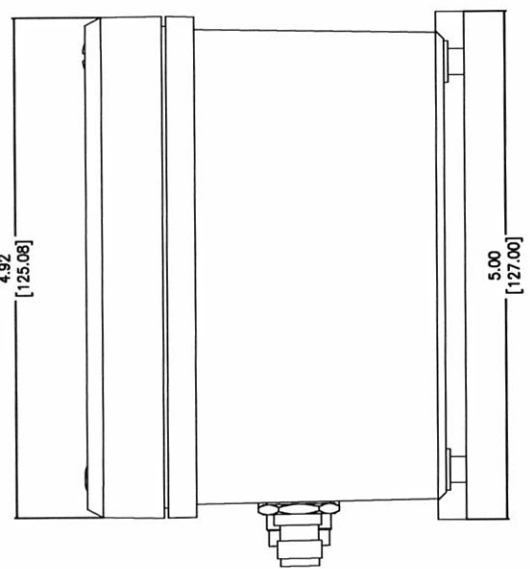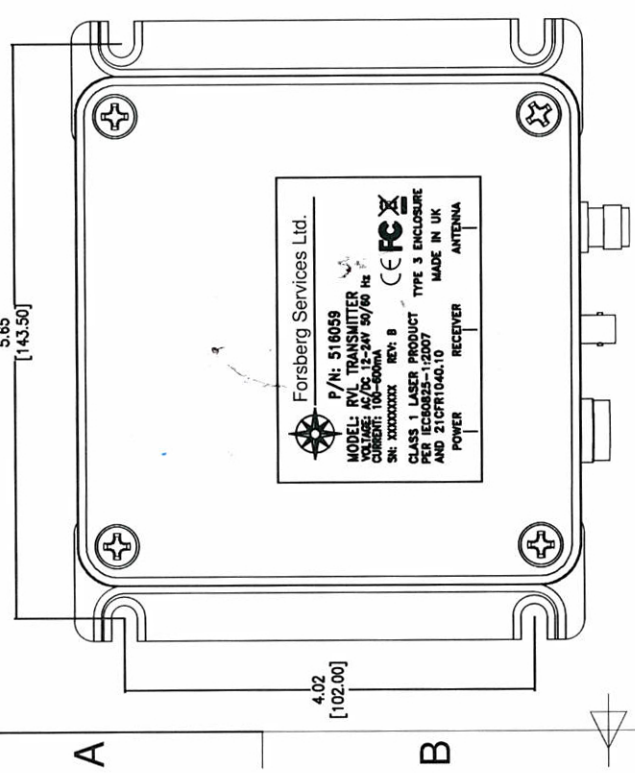

Part No: 516059		Issue: B		H/W Version: -	
Material: Various		Weight: <1.36kg		Scale: NTS	
Date: 06-05-15		Drawing No: A500-08-200		Drawing Version: V1.00	
Author: LS		Checked: RV		Approved: SM	
Date: 06-05-15		Forsberg Services Ltd. Richmond House White Cross Lancaster LA1 4XF U.K.		Unless Otherwise Specified: Dimensions are in Inches Surface Finish: N/A Linear Tolerance: N/A Angular Tolerance: N/A Debur and break sharp edges	
RVL TRANSMITTER		Part No: 516059		Issue: B	
Author: LS		Checked: RV		Approved: SM	
Date: 06-05-15		Forsberg Services Ltd. Richmond House White Cross Lancaster LA1 4XF U.K.		Unless Otherwise Specified: Dimensions are in Inches Surface Finish: N/A Linear Tolerance: N/A Angular Tolerance: N/A Debur and break sharp edges	
RVL TRANSMITTER		Part No: 516059		Issue: B	
Material: Various		Weight: <1.36kg		Scale: NTS	
Date: 06-05-15		Drawing No: A500-08-200		Drawing Version: V1.00	
Author: LS		Checked: RV		Approved: SM	
Date: 06-05-15		Forsberg Services Ltd. Richmond House White Cross Lancaster LA1 4XF U.K.		Unless Otherwise Specified: Dimensions are in Inches Surface Finish: N/A Linear Tolerance: N/A Angular Tolerance: N/A Debur and break sharp edges	

1 2 3 4 5 6