

Audio inputs provided on barrier strip (on Stand Alone unit only)

StudioHub+ RJ45 input 1 and power in (on non Stand Alone unit only)




Stereo StudioHub+ RJ45 input 2 and power in (on non Stand Alone unit only)


Gain Straps (pre-fader)

JU3, JU4 Input 1

JU5, JU6 Input 2

JU7, JU8 Input 3

-  No jumper for unity gain normal for +4dBu applications
-  +10dB gain
-  +20dB gain

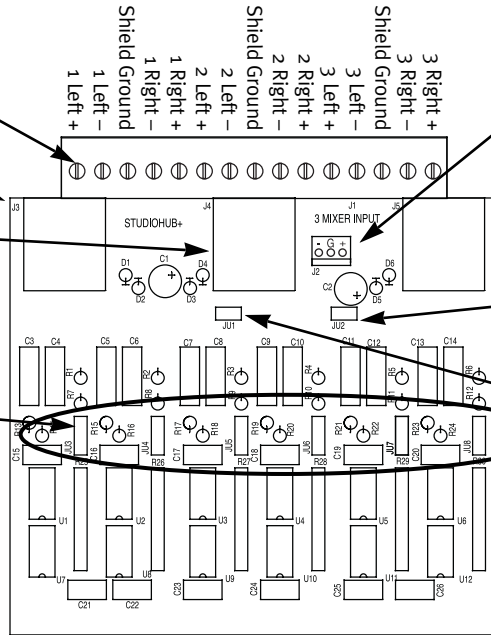

Direct power input +/- 15 volts DC

StudioHub+ RJ45 Input 3 and power in (on non Stand Alone unit only)

JU2

Install to connect shield ground to chassis ground

JU1

Install to connect shield ground to power ground

**Part # SH-MIXER StudioHub+ 3 Mixer Plate (Input Board)**  
**Part # SH-MIXERSA Stand Alone**

Stand Alone Units include barrier strip & power supply (wall wart)

